

Designed for applications ranging from 25 to 250 Gallons

mid to large sized air conditioning & refrigeration plants - main & auxiliary engines 500hp & up  
 small to medium size black water systems - heat exchangers  
 piping systems to 14" diameter

*Trac Ecological's advanced descaling systems provide an environmental answer to internal, in-place cleaning, of all your vital onboard equipment!*

Originally designed 15 years ago, the **Pro-Flush (XL)™** was TRAC's only answer when it came to flushing needs. Today the **Pro-Flush (XL)™** is joined by a line of flushing equipment and effectively bridges the gap between the **Port-O-Flush™** and the **Pro-Flush Mobil™** combining the best of both worlds.

Built on a rugged, lightweight platform with 8" pneumatic tires, the **Pro-Flush (XL)™** is both portable and highly maneuverable. But don't let it's size fool you, the **Pro-Flush (XL)™** can handle big jobs! With a built in filter and pressure regulator, versatility is standard on all **Pro-Flush (XL)™** units. Available with the same centrifugal pump configuration employed on the **Pro-Flush Mobil™**, the **Pro-Flush XL™** only sacrifices tank size making it perfect for applications where trailer access is impossible.

**The Pro-Flush (XL) is perfect for:**


- Engines
- Boilers
- Black water systems
- Generators
- HVAC systems
- Piping systems
- Gray water systems
- Heat exchangers
- On-site service
- In-house service
- Refinery service
- Ship-board service

**Specifications:**

- Anti-corrosive platform with 8" pneumatic tires.
- Open head nylon tank with gallon readings.
- Available in 110/20VAC 50/60 cycle.
- Pressure-Flow control system.

Dimensions

- Length ▶ 44.59"
- Width ▶ 24.25"
- Height ▶ 55.12"

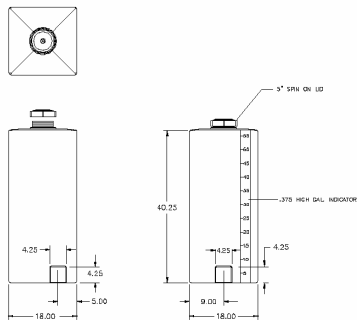

**Comparison Chart**

|                          | <b>Pro-Flush™</b> | <b>Pro-Flush XL™</b> |
|--------------------------|-------------------|----------------------|
| <b>tank</b>              | 35 gallons        | 55 gallons           |
| <b>pump</b>              | 10.3gpm @ 60psi   | 20gpm @ 55psi        |
| <b>piping</b>            | 1" Sch. 80pvc     | 1.25" Sch. 80pvc     |
| <b>filter</b>            | 15 gpm            | 25 gpm               |
| <b>pressure range</b>    | 5-55 psi          | 5-55 psi             |
| <b>application range</b> | 25-150 gallon     | 25-250 gallon        |

*The Pro-Flush™ has been designed for use with any of TRAC's environmentally friendly products. Careful attention has been given to ensure safety of both you and your equipment.*

Contact us today for  
 the latest  
 pictures and drawings!



**Optional Equipment:**

- 1" Ultra-force hose, fitted with 1"npt threaded connections.
- Safety cut-off flow-switch plumbed into return line.
- Product immersion heater kit.
- Sch. 40 PVC construction.
- In-line Digital PH meter.
- Flange & fitting field kit.

Dealer/Distributor Label

TRAC Ecological  
 3921 SW 47th Ave. Suite 1020 Fort Lauderdale, FL 33314 USA  
 001.954.987.2722 Voice ~ 001.954.583.4922 Voice  
 001.954.583.4933 Fax  
 www.TRAC-online.com ~ Info@TRAC-online.com