
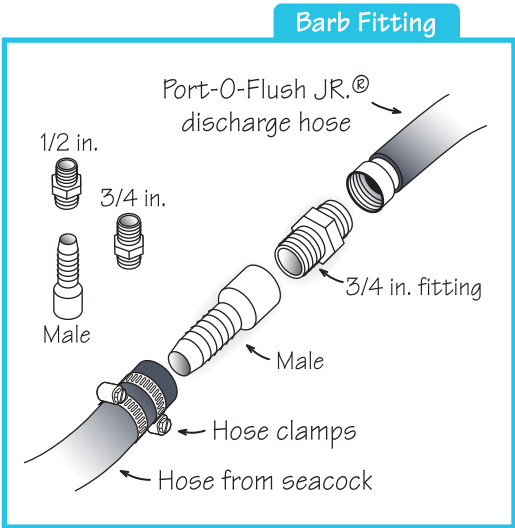


Trac Ecological Barnacle Buster Static AC Unit Flush

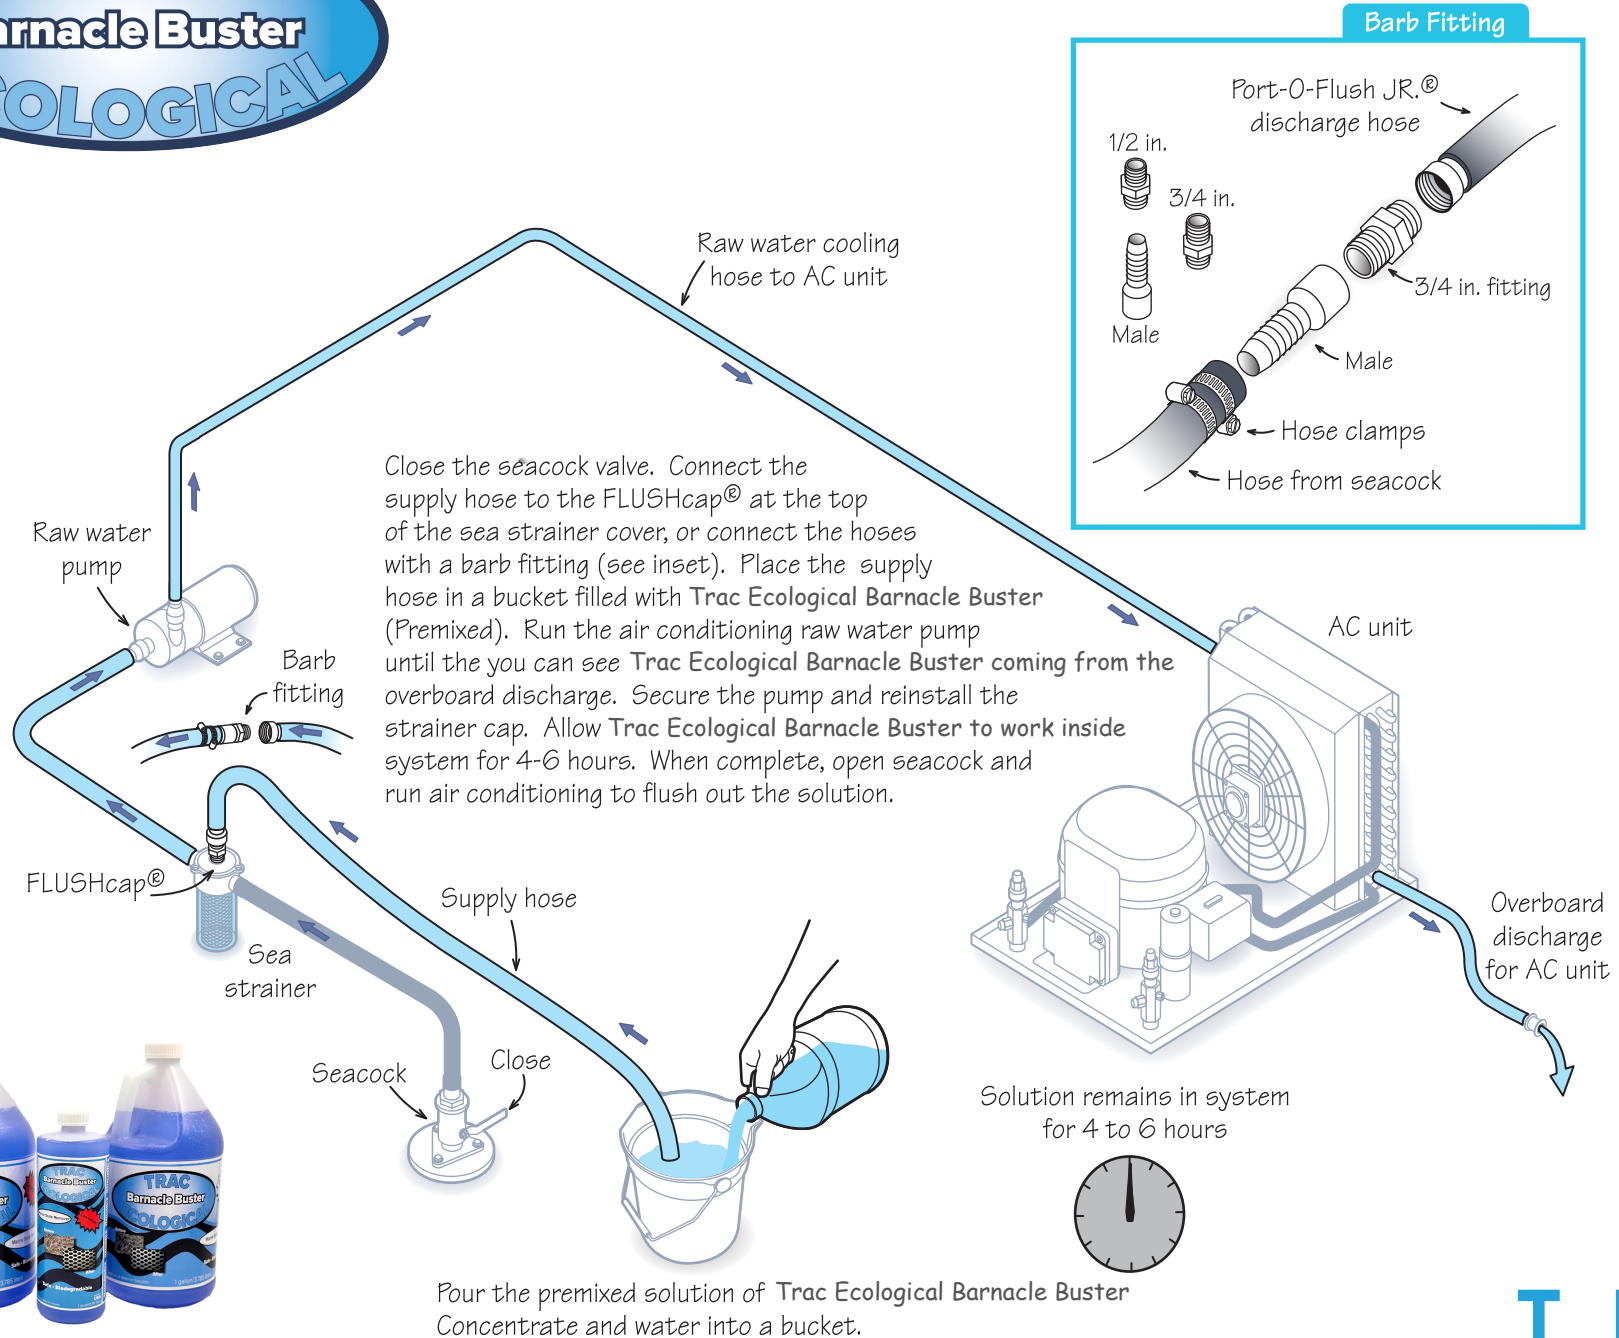

Close the seacock valve. Connect the supply hose to the FLUSHcap® at the top of the sea strainer cover, or connect the hoses with a barb fitting (see inset). Place the supply hose in a bucket filled with Trac Ecological Barnacle Buster (Premixed). Run the air conditioning raw water pump until you can see Trac Ecological Barnacle Buster coming from the overboard discharge. Secure the pump and reinstall the strainer cap. Allow Trac Ecological Barnacle Buster to work inside the system for 4-6 hours. When complete, open seacock and run air conditioning to flush out the solution.