



Trac Ecological Barnacle Buster Generator Flush with Port-O-Flush Jr.




Inlet point: connect the discharge hose of the Port-O-Flush JR.® to the FLUSHcap® at the top of the sea strainer cover, or connect the hoses with a barb fitting (see inset).

Impeller

Remove the impeller, replace the faceplate and gasket.

Recovery point: connect the raw water discharge hose (from the exhaust elbow) to the recovery hose of the Port-O-Flush JR.® with a barb fitting (see inset).

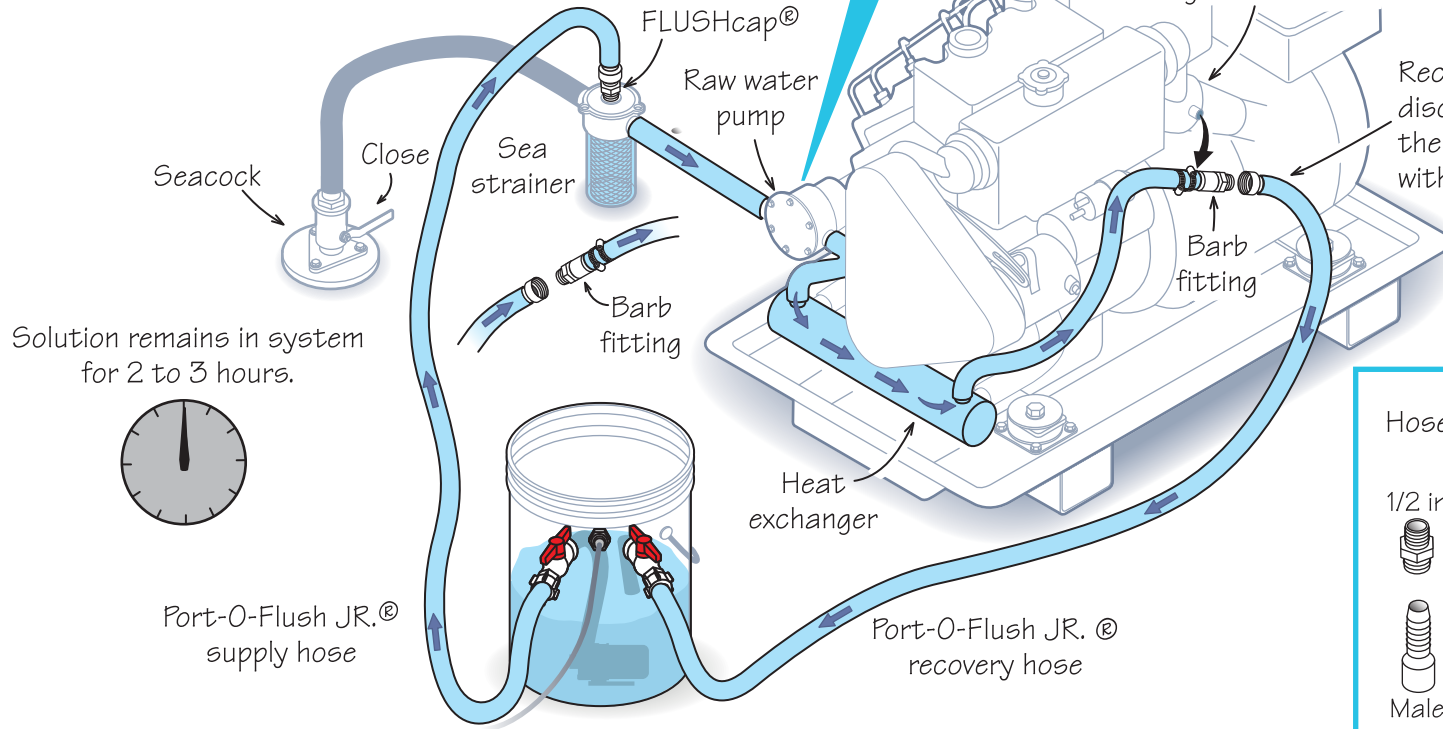

Solution remains in system for 2 to 3 hours.



Port-O-Flush JR.® flushing unit with premixed solution of Trac Ecological Barnacle Buster Concentrate and water.

Barb Fitting

Labels in diagram: Hose from exhaust elbow nipple, 1/2 in. Male, 3/4 in. Male, Hose clamps, 3/4 in. fitting, Port-O-Flush JR.® recovery hose.