TRAC ECOLOGICAL Zebra Mussel Buster

Zebra Mussel Buster Generator Flush with Port-O-Flush Jr.

Inlet point: connect the discharge hose of the Port-O-Flush JR.® to the FLUSHcap® at the top of the sea strainer cover, or connect the hoses with a barb fitting (see inset).

Impeller

Remove the impeller, replace the faceplate and gasket.



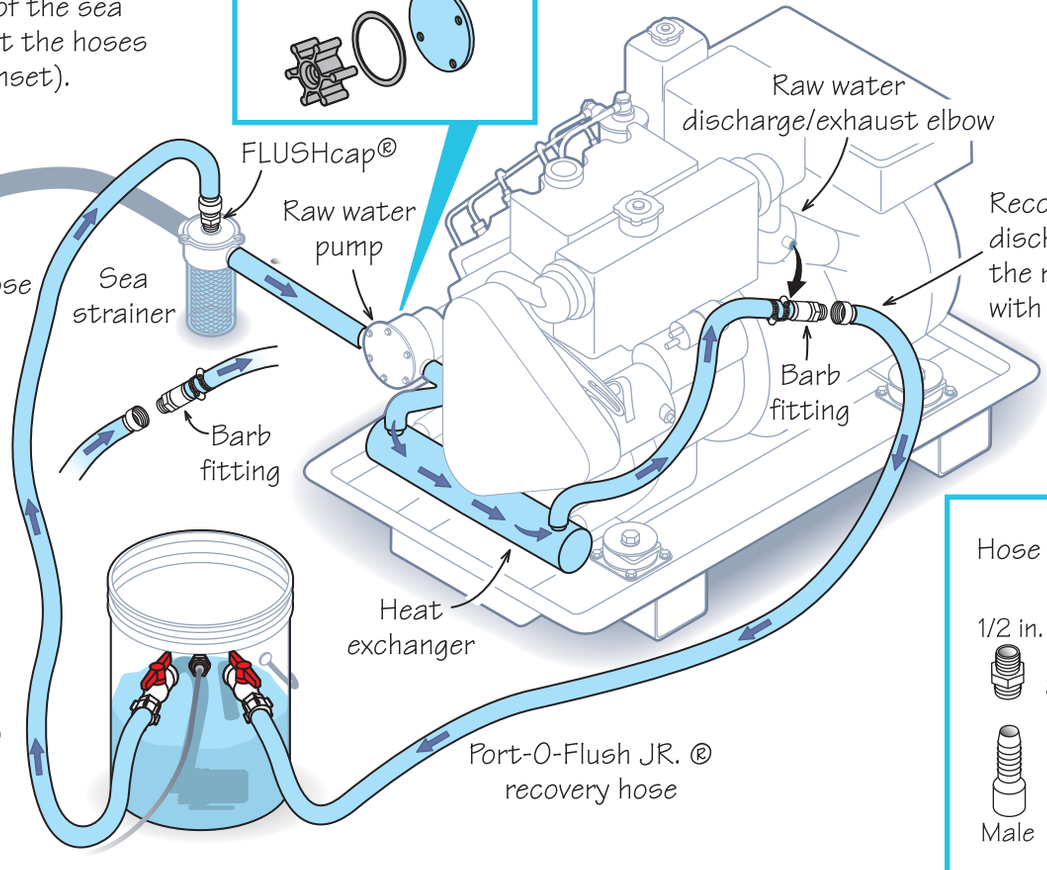

Recovery point: connect the raw water discharge hose (from the exhaust elbow) to the recovery hose of the Port-O-Flush JR.® with a barb fitting (see inset).

Solution remains in system for 2 to 3 hours.

Port-O-Flush JR.® flushing unit with premixed solution of **Zebra Mussel Buster** Concentrate and water.

Barb Fitting

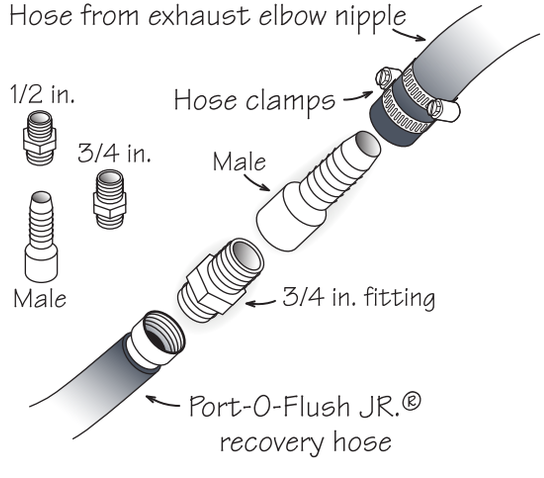

TRAC ECOLOGICAL
A Drew Marine BUSINESS